

SAS

At SAS we have in excess of 35 years of practical experience in the rendering and facades industry from personal application of materials to technical troubleshooting on site. We are always striving to improve our service and provide quality information as quickly as possible.

We are constantly developing and innovating new products for the market place to provide the best solutions for rendering and plastering. Our product portfolio includes premium quality products offering longevity to the proprietor as well as technically sound and fast applications to the contractor.

Nationwide Delivery

Stock items : 1-2 working days Non stock items: Up to 10 working days

Office Hours

Monday-Thursday - 08:00-17:00 Friday - 08:00-16:30

Call the office on - 01647 24620

Information contained in this brochure was correct at the date of print. SAS (Europe) Ltd reserve the right to make alterations to the content of this brochure and to the products and services we make available as part of our continuing commitment to improvement.

GOREND HBS

GoRend HBS is part of the SAS (Europe) Ltd range of products and systems



www.sas-europe.com

E: info@sas-europe.com

SAS (EUROPE) LTD

CHERITON BISHOP | EXETER | EX6 6JE | UK T: +44 (0)1647 24620 F: +44 (0)1647 24020



COAT 2 PASS MONOCOUCHE RENDER

GOREND HBS Overview

GoRend HBS is a factory batched, through coloured monocouche render, specifically designed and formulated for new build properties. GoRend HBS is quick and easy to apply in one coat over new blockwork. GoRend HBS has an attractive and durable 2mm scraped aggregate finish.



Features & Benefits


- 12 Colours next working day delivery available on stock colours
- Fast Application
- 5-36 hours scrape time depending on weather conditions
- Suitable for machine and hand application
- Through coloured low maintenance decorative finish
- Can be directly applied to standard 7kN concrete block which is cost effective and speeds up application
- High tensile and compressive strength gives long term durability
- Vapour permeable allows walls to breath, providing a healthy living environment

Application

GoRend HBS is mixed with clean water and applied to new blockwork in 2 passes, "wet on wet". ProMesh grade 5 is embedded in to the first pass and around all apertures and stress points (fully meshed on lightweight block).

GoRend HBS is then ruled off, flattened and left to cure. Once the GoRend HBS has had sufficient time to dry (5-36 hours depending on weather conditions) GoRend HBS is scraped back with a nail float, any loose scrapings are brushed off and then left to fully cure.

Colour Palette

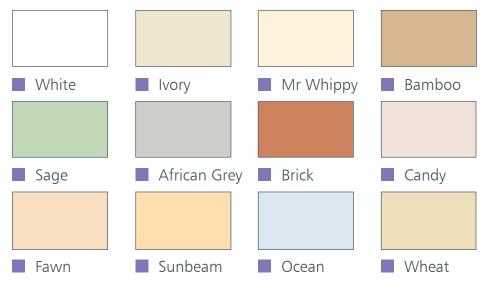

Colours indicated above are as close as printing techniques permit. Please contact us directly for samples.

COMING SOON

GOREND OCR - One Coat Render

A high performance cement based basecoat suitable for use as a basecoat ready to receive a Monocouche Render, Thin Coat Render or as a factory batched sand and cement alternative.

GOREND HPB - High Polymer Base

A high polymer modified high performance cement based waterproofing base coat suitable for use as a keycoat or basecoat for Monocouche or Thin Coat Render.

GOREND DASH - Dash Receiver

A high performance polymer and fibre modified water repellent through-coloured dash receiver render available in 12 colours.

GOREND ATX - Acrylic Texture Coat

An acrylic based thin coat render suitable for use with GoRend OCR and GoRend HPB to create a modern attractive finish, GoRend ATX is available in 35,000+ colours

GOREND AMP - Acrylic Masonry Paint

An acrylic based masonry paint suitable for overcoating GoRend basecoats, GoRend ATX and as a hard wearing paint for overcoating sand and cement render.



